


TEILE

“SLw”



Key features:

18" active subwoofer for studio monitoring purpose
powered by 2 ABACUS Dolifet amplifier channels
amplifier channel with DSP
driven by bridge-mode dual-amplifiers
gain control on the plate amp

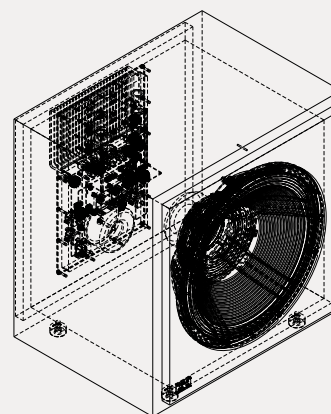

Frequency Response	20 Hz - 120 Hz
Crossover Points	Adjustable
Amp power	500W
Driver Configuration	1x LF 18"
Connectors	XLR, chinch Analog Crossover In/Out
Gain Control	Input Gain (-6 dB... +6 dB) High Pass L/R (48 Hz... 120 Hz) Low Pass SUM (48 Hz... 120 Hz) Slope (0°: 12 dB/Oct - 24 dB/Oct, 180°: 12 dB/Oct - 24dB/Oct) Roll-off (12 Hz... 40 Hz)
Enclosure	Closed
Finish	Santos Palisander veneer, supermatt ceramic black
Weight	73.4kg

3D file: [TEILE SLw.USDZ](#)